


Interface FLOR | FastForward

TECHNISCHE SPECIFICATIES

Type	Getufte velours	Style Number	6081400005
Poolmateriaal	Recycled Solution Dyed Nylon	Gebruiksintensiteit	EN 1307 33 Heavy Contract
Poolinzetgewicht	520g/m ² ± 10%	Radiant panel	(EN ISO 9239/1) Bfl S1 (EN ISO 13501)
Totaalgewicht	4200g/m ² ± 5%	Hot Metal Nut	Pass, low radius of effects of ignition
Poolhoogte	1.7 ± 0.3 mm	Rolstoelgeschikt	≥ 2.4 (EN 985)
Totale dikte	5.4 mm ± 0.3 mm	Dimensionele stabiliteit	≤ 0.2% (ISO 2551)
Rijen per 10 cm	5/64 - 52	Doorlaatweerstand	5 x 10 ⁵ Ω >< 1 x 10 ¹⁰ Ω Computerquard (ISO 10965) (IBM)
Aantal noppen per m2	108,000 ± 5%	Kleurechtheden - Licht	≥ 7 (ISO 105 B02)
Ruguitvoering	Graphlex®	Aantal tegels per doos	20 - 5 m ² (50 x 50 cm ± 0.2%)

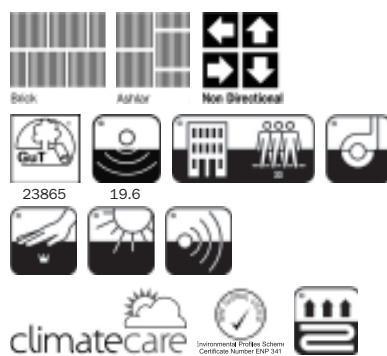

Mission Zero:
our promise to eliminate
any negative impact our company
may have on the environment
by the year 2020.

www.interfaceflor.eu

Technische wijzigingen, ter verbetering van het product, worden voorbehouden