
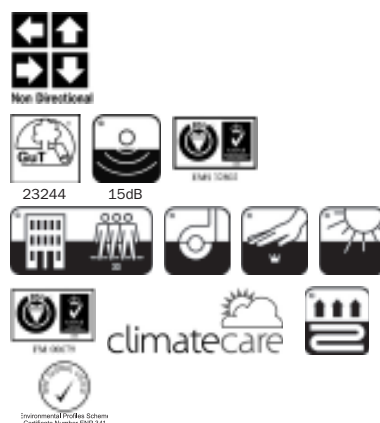


Interface FLOR | Straightforward

TECHNISCHE SPECIFICATIES

Type	Microtuft bouclé	Style Number	3081200005
Poolmateriaal	Recycled Solution Dyed Nylon	Gebruiksintensiteit	Heavy Contract
Poolinzetgewicht	485g/m ² ± 5%	Radiant panel	(EN ISO 9239/1) Cfl S1 (EN ISO 13501)
Totaalgewicht	4685g/m ² ± 5%	Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)
Poolhoogte		Rolstoelgeschikt	≥ 2.4 (EN 985)
Totale dikte	6.0 mm ± 0.5 mm	Dimensionele stabiliteit	≤ 0.2% (ISO 2551)
Rijen per 10 cm	5/64 - 50.4	Doorlaatweerstand	5 x 10 ⁵ Ω >< 2 x 10 ¹⁰ Ω Computerguard (ISO 10965) (IBM)
Aantal noppen per m2	166,320 ± 5%	Kleurechtheden - Licht	6 (ISO 105/B02)
Ruguitvoering	Graphlex®	Aantal tegels per doos	20 - 5m ² (50 x 50 cm ± 0.15%)

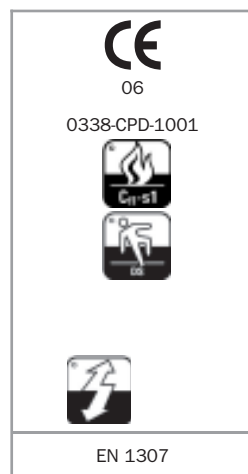

Mission Zero:
our promise to eliminate
any negative impact our company
may have on the environment
by the year 2020.

www.interfaceflor.eu

Technische wijzigingen, ter verbetering van het product, worden voorbehouden