




Acomomo[®] Acoustic ceilings

Our acoustic ceilings provide a sturdy, industrial look along with perfect acoustics. From offices to business premises, or retail shops to classrooms, you can be sure of a pleasant sound experience. We work exclusively with Acomomo[®], a product we developed ourselves. It consists of cellulose flakes manufactured from 100% recycled material, and comes in five thicknesses and AW ratings. An Acomomo[®] acoustic ceiling also comes with a five-year warranty on the ceiling's adhesion and performance. We can work with either our standard colour range, or with custom colours if desired.



Acoustic Spray Properties

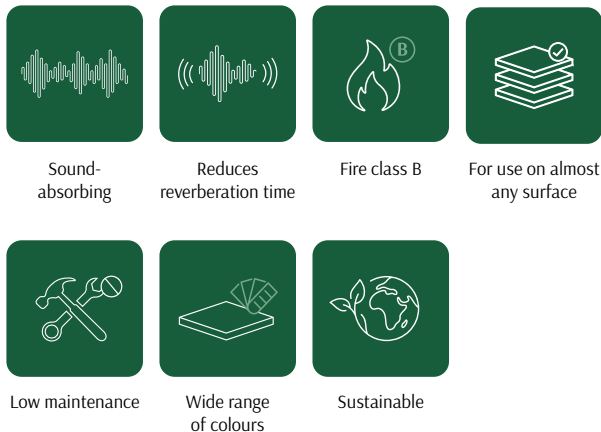

	15 mm	20 mm	25 mm	30 mm	35 mm
Class	C	C	B	A	A
AW	0,60	0,75	0,80	0,95	1,00
NRC	0,75	0,85	0,90	0,95	1,00
125 Hz	0,11	0,18	0,17	0,24	0,29
250 Hz	0,31	0,49	0,52	0,67	0,73
500 Hz	0,73	0,92	1,00	1,06	1,09
1000 Hz	0,95	0,103	1,01	1,03	1,09
2000 Hz	0,94	1,00	0,97	1,00	0,99
4000 Hz	1,06	1,08	1,07	1,03	0,96

Fire class B s2 d0

Acomomo[®] Solid

- ✓ Various thicknesses
- ✓ Standard colours: white, black, anthracite and light greys
- ✓ For use on almost any surface
- ✓ 100% recycled material

Acomomo[®] Smart

- ✓ Various thicknesses
- ✓ Standard colours: grey, light grey and beige
- ✓ For use on almost any surface
- ✓ 100% recycled material

Acomomo[®] Style

- ✓ Various thicknesses
- ✓ For use on almost any surface
- ✓ 100% recycled material
- ✓ Custom colours



Scan the QR code
for more information
or contact us on
+31 (0)345 - 745 401

Rijnstraat 51 B
4191 CK, Geldermalsen
The Netherlands
info@acomomo-akoestiek.nl